

DEVILBISS


Pro CLEAN 2

PC2 GUN WASH CLEANING MACHINE

Faster • Cleaner • Efficient



INFO OF MACHINE

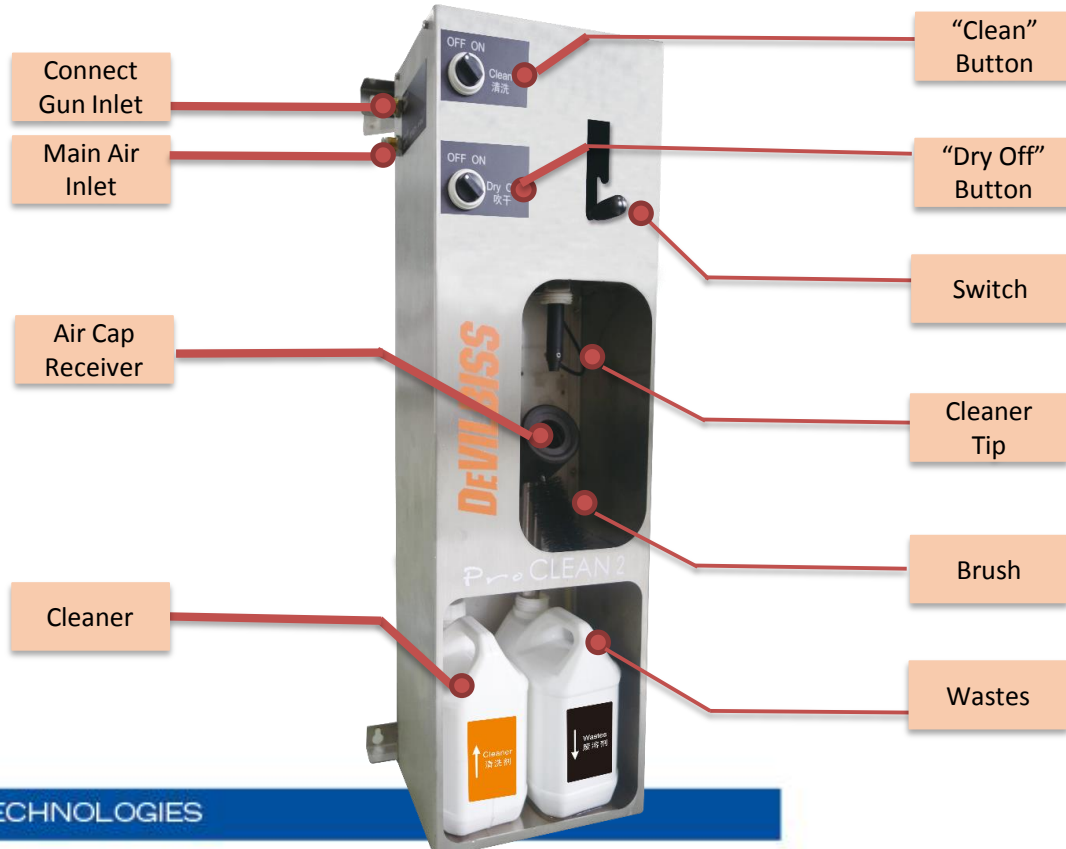

ADVANTAGE

- Easily Operate

- Save Time

- Save Waste



FIRST USE

◆ Fixed the machine on the wall

ProCLEAN2 喷枪清洗机
快速操作指南
DEVILBISS

请使用制造商建议的清洗剂。清洗前后及时补充和更换清洗剂！

1 性能特点

- 适用于非腐蚀性和腐蚀性清洗。
- 家用型超细雾化喷嘴清洗。雾化力强，清洗效率高且节能环保。
- 高达2000bar的动态工作压力。
- 大气流速度高达40m/s。
- 可壁挂在墙上，节约空间。

2 技术参数

- 空气压力为：4-6bar。
- 最大喷射距离：每个喷嘴长度不同，2-10m。
- 清洗时间：少于1分钟。
- 耗水量：1.2-2.0l/10min。
- 重量：11kg。

3 清洗准备

- 1) 确保空气过滤器和喷嘴清洁。
- 2) 将“清洗剂”储液瓶加入清洗剂。
- 3) 按照产品说明书正确安装喷嘴。

4 放置规格

- 1) 请保持最低空气压力。
- 2) 请保持机器与墙面的距离。
- 3) 避免将手伸入，以免发生危险。


5 开始清洗

- 1) 将“清洗剂”储液瓶“ON”后，确保喷嘴、喷嘴与喷嘴的高精度。
- 2) 启动喷射开关，清洗。清洗3-5秒，避免喷嘴堵塞。
- 3) 将清洗剂储液瓶“OFF”后，将喷嘴与喷嘴的高精度。
- 4) 将“清洗剂”储液瓶“ON”后，保持“ON”按钮“ON”后，按下按钮。

6 产品分解图及零件型号

零件号	零件名称	单位	数量
1	8022-2C	喷嘴	1
2	8012-2C	喷嘴附件	1
3	8008-2C	喷嘴附件	1
4	8017-2C	喷嘴附件	1
5	8002-2C	喷嘴附件	1
6	8003-2C	喷嘴附件	1
7	8011-2C	喷嘴附件	1
8	8004-2C	喷嘴附件	1
9	8014-2C	喷嘴附件	1
10	8015-2C	喷嘴附件	1
11	8016-2C	喷嘴附件	1
12	8017-2C	喷嘴附件	1
13	8018-2C	喷嘴附件	1
14	8019-2C	喷嘴附件	1
15	8020-2C	喷嘴附件	1
16	8018-2C-2	喷嘴附件	1
17	8018-2C-1	喷嘴附件	1
18	8018-2C	喷嘴附件	1
19	8021-2C	喷嘴附件	2
20	8018-2C	喷嘴附件	1
21	8022-2C	喷嘴附件	1

关注“DevilBiss 喷枪”微信公众号，获取洗枪机操作视频信息



FIRST USE

- ◆ Connect the compress air line to “Main Air” inlet



1、 Initial State



2、 Fix Quick detach fitting



3、 Connect air line



PREPARATION

- ◆ Remove the paint CUP



PREPARATION



1) Turn off
the fluid
adjusting knob



2) Put some
cleaner to
cleaner bottle



3) Put two
suction pipets
to each bottle



OPERATION

- ◆ Step 1: Connect the gun to air line




OPERATION

- ◆ Step 2: Put the gun into air cap receiver




OPERATION

- ◆ Step 3: Remove the switch, Put the gun's fluid right to cleaner tip

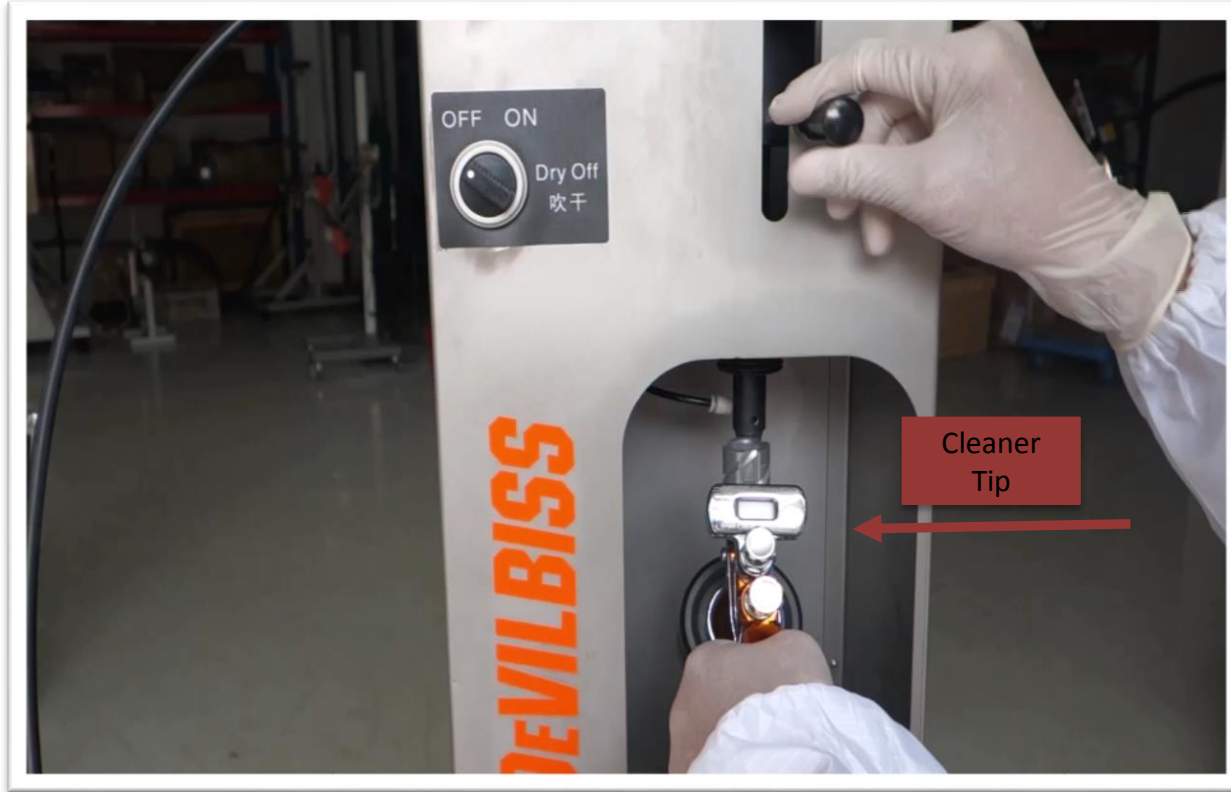


OPERATION

- ◆ Step 4: turn on “clean” button ,waiting 4 seconds, until clean solution to cleaner tip

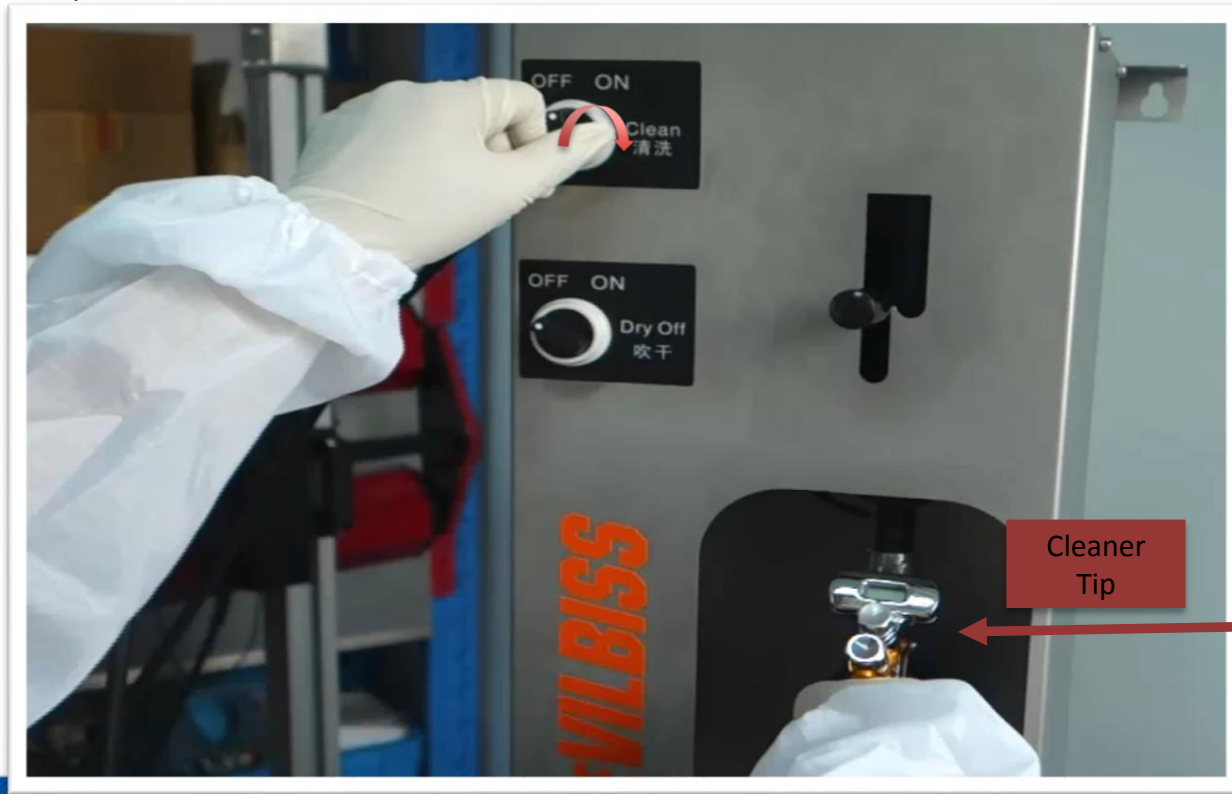

OPERATION

- ◆ Step 5: Press the gun trigger 5 seconds, then loose, repeat it for 3 or 5 times.

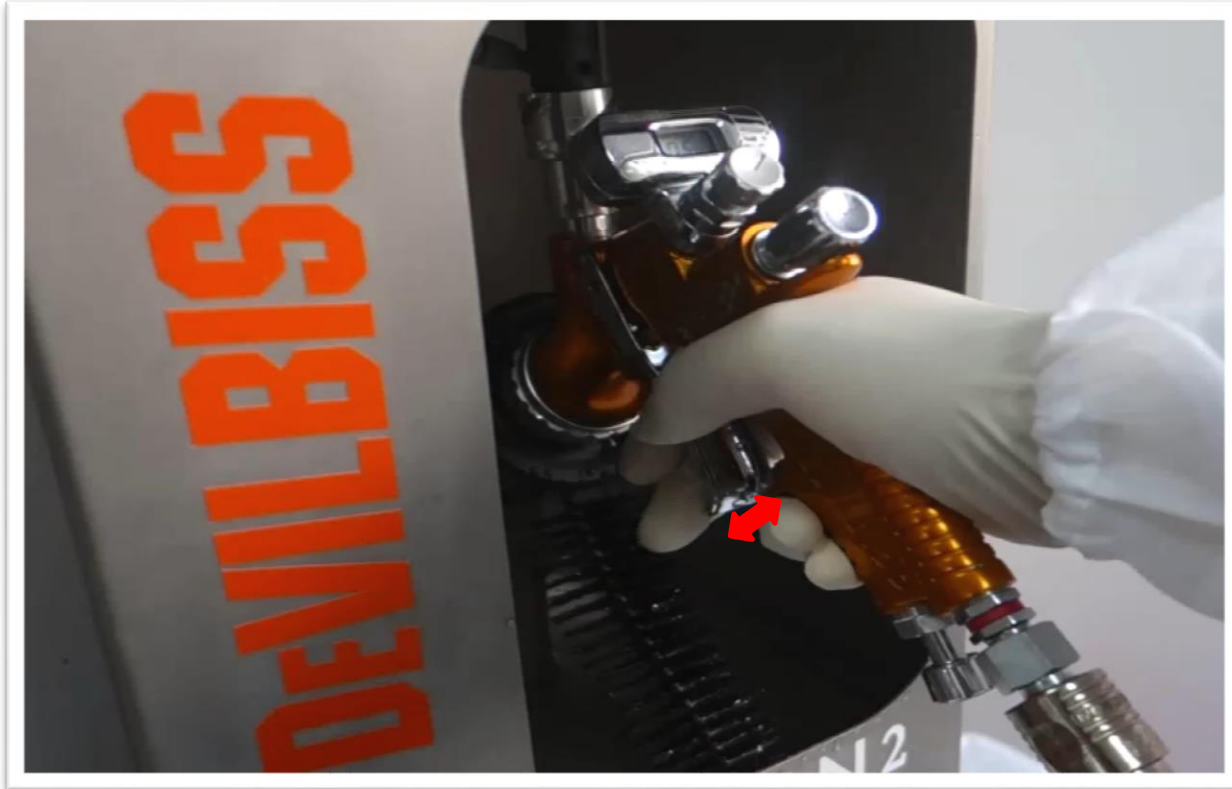


OPERATION

- ◆ Step 6: Take the switch to original location, remove gun from cleaner tip, using brush to clean air cap and gun body.



OPERATION

- ◆ Step 7: turn off the “Clean” Button, turn on the “Dry Off” Button at the same time.

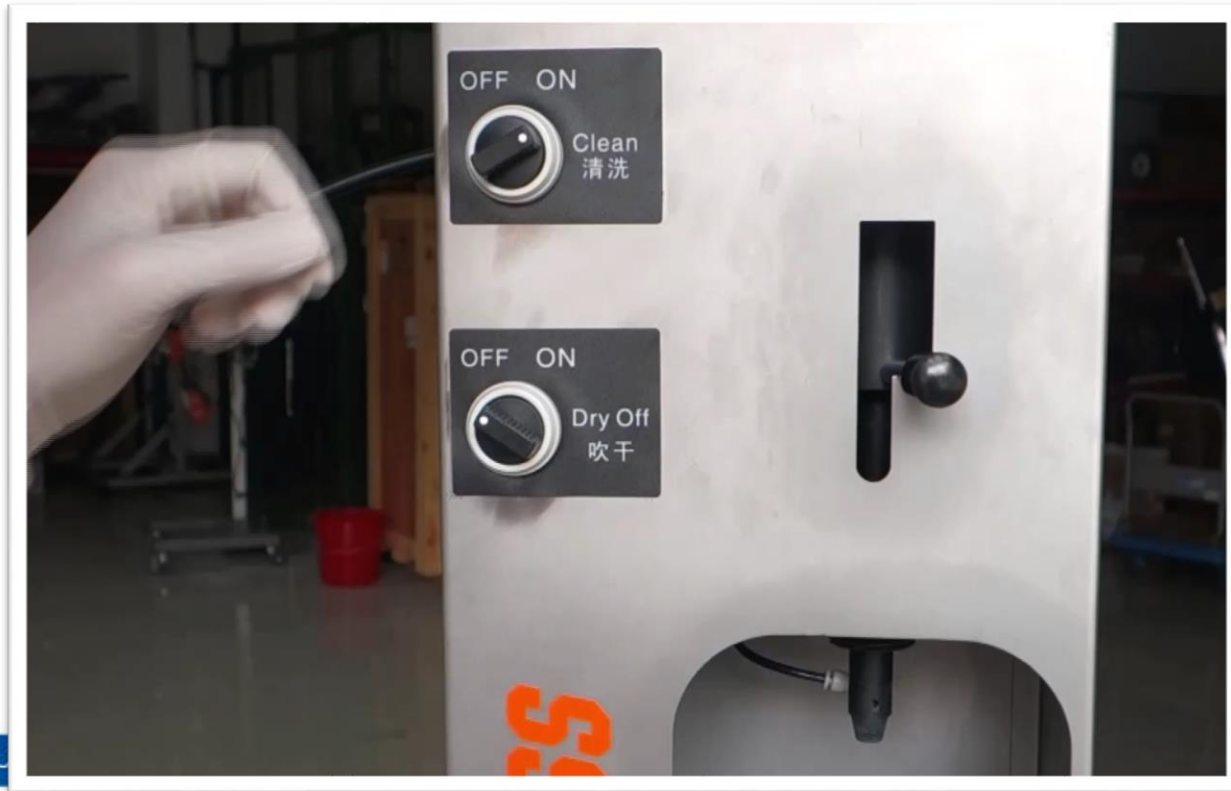

OPERATION



Before



After

The total cleaning process less than 1 minute!





Thank You

CARLISLE FLUID TECHNOLOGIES

Carlisle Proprietary

